



US 20160229975A1

(19) **United States**

(12) **Patent Application Publication**
NOORDEGRAAF et al.

(10) **Pub. No.: US 2016/0229975 A1**

(43) **Pub. Date: Aug. 11, 2016**

(54) **PROCESS FOR PRODUCING FOAM
MOULDINGS**

Publication Classification

(71) Applicant: **Synbra Technology B.V.**, Etten-Leur
(NL)

(51) **Int. Cl.**
C08J 9/232 (2006.01)
C08J 9/16 (2006.01)
C08J 9/00 (2006.01)

(72) Inventors: **Jan NOORDEGRAAF**, WIJCHEN
(NL); **Petrus Frederikus Maria
RENSSEN**, DOORNENBURG (NL);
Kenneth VAN DEN HOONAARD,
WIJCHEN (NL); **Walter VAN
CASTEREN**, SCHAIJK (NL);
Josephus Petrus Maria DE JONG,
BRED A (NL); **Gerardus Wilhelmus
Jozef EILERS**, HELMOND (NL);
Joannes Chrysostomus VAN SAS,
HALSTEREN (NL)

(52) **U.S. Cl.**
CPC **C08J 9/232** (2013.01); **C08J 9/0061**
(2013.01); **C08J 9/16** (2013.01); **C08J 2325/06**
(2013.01); **C08J 2467/04** (2013.01); **C08J**
2401/02 (2013.01); **C08J 2467/02** (2013.01)

(57) **ABSTRACT**


The present invention relates to mouldings and processes for producing the same. In particular, the invention relates to foam mouldings and methods of making the same comprising providing a first amount of expandable foam particles and providing a second amount of expandable foam particles and preparing a physical mixture on the basis of the first and second amount of foam particles and introducing the mixture into a mould and sintering under pressure and heat, for example, where the chemical origin of the first amount of expandable foam particles differs from the chemical origin of the second amount of foam particles, and optionally further comprising the presence of a coating in the mixture before the introduction of the mixture into the mould.

(21) Appl. No.: **15/017,244**

(22) Filed: **Feb. 5, 2016**

(30) **Foreign Application Priority Data**

Feb. 6, 2015 (NL) 2014258

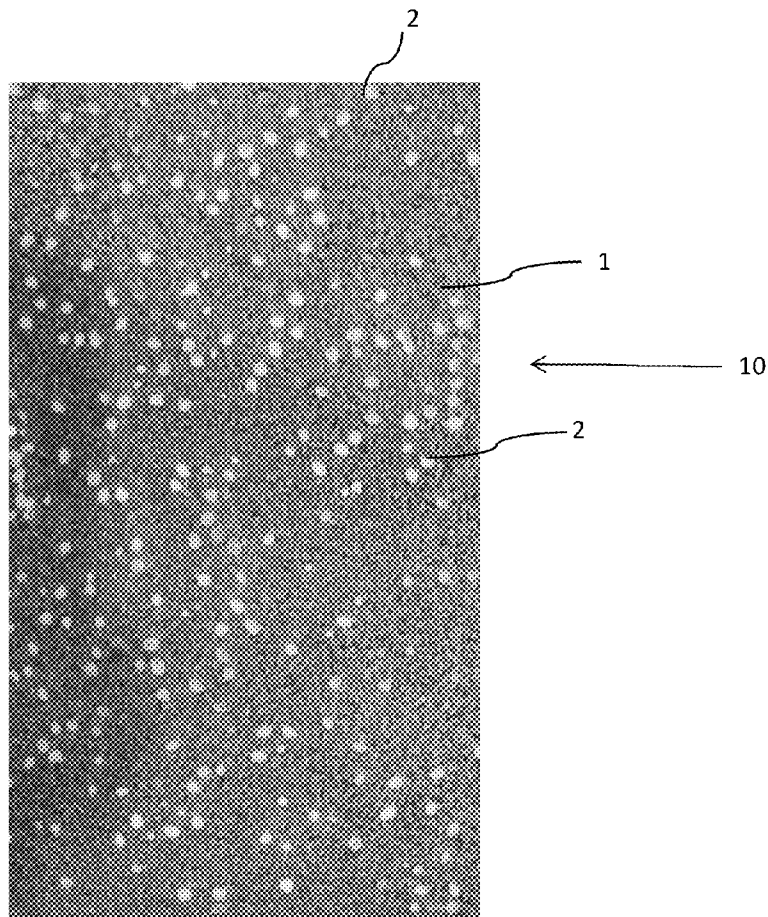

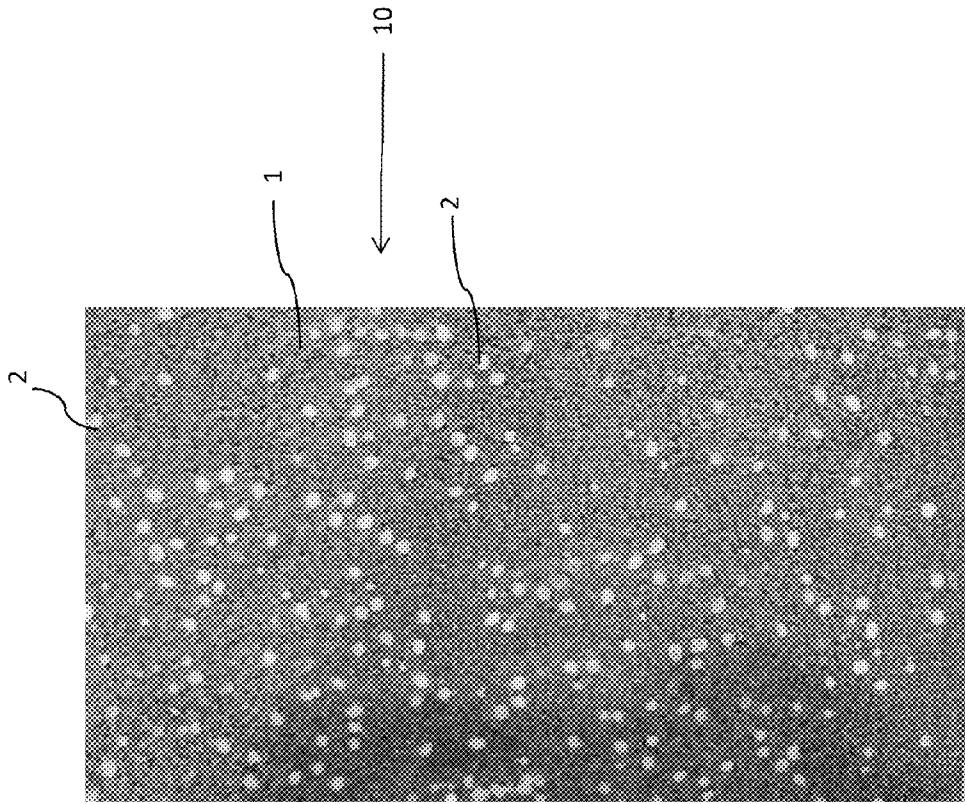


Fig. 1

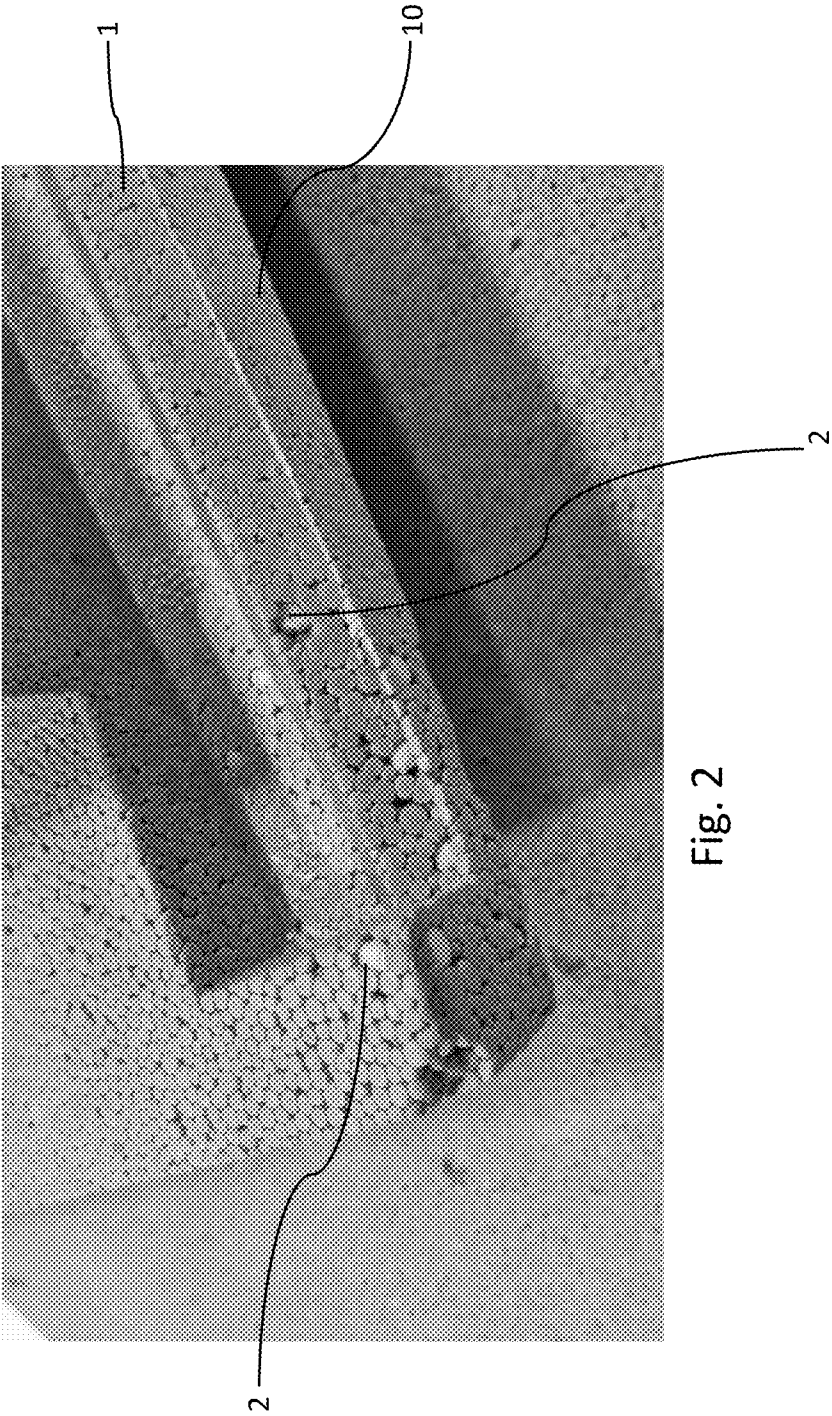


Fig. 2

PROCESS FOR PRODUCING FOAM MOULDINGS

[0001] The present invention relates to a process for producing foam mouldings, as well as to foam mouldings.

[0002] The production of foam moulded parts according to international patent application WO2011133035 (corresponding to EP 2 561 013) in the name of the present applicant takes place by using a method in which the starting materials, which may have been pre-expanded, are confined in so-called steam chambers, in which further expansion of the polystyrene particles takes place. During this possible pre-foaming virgin EPS is for example treated under influence of steam, whereby the granules of expanded polystyrene are expanded. After such treatment the thus pre-foamed EPS can be further developed in a subsequent treatment, which is maturing, in particular storing the thus treated granules for a period of 4 to 48 hours. The final form occurs by treating the different starting materials in a steam mould or a steam treated mould. During the process the particles will adhere to each other and a compact structure is formed. Before the steam chambers or moulds are filled with a combination of starting materials, firstly a mixture of the desired EPS material is produced, whereby the desired composition is summarized in the dependent claims. After putting together the desired mixture, whereby the starting materials in particular are taken from silos. The containers in the form are filled and thereafter steam is led through. Due to the high temperature of the steam the present blowing agent will attempt to expand, and the EPS particles will fuse together due to the steam heating them to above the glass transition temperature en also due to the limited room in the form. The mould used here fore is provided with small openings through which the blowing agent and steam can pass.

[0003] According to the Dutch patent NL 1033719 in the name of the present applicant a method for the production of foamed moulded parts is disclosed wherein particles of polylactic acid are impregnated in a pressure vessel with a blowing agent, namely CO₂ at a pressure of 20 bars for 5 hours. The accordingly obtained particles of polylactic acid are subsequently pre-foamed or pre-expanded by application of warm air (with a temperature of about 90° C.) for duration of 1 minute. The pre-foamed particles of polylactic acid have a density of approximately 60 g/l. Finally the pre-foamed particles of polylactic acid are coated in a fluidized bed reactor and after the coating of the pre-foamed polylactic acid particles the particles are once again impregnated with a blowing agent namely CO₂ by treatment in a pressure vessel at 20 bar for a duration of 20 minutes. The once again impregnated particles of polylactic acid contain approximately 7% by mass of CO₂. Subsequently the once again impregnated particles of polylactic acid are added to an industrial production unit for foamed moulded parts, wherein by application of steam further expansion and fusion from the pre-foamed particles of polylactic acid occurs to obtain a foamed moulded part, with a density of 60 g/l. According to the Dutch patent NL 1033719 it is also possible to place particles of polylactic acid after extrusion in a fluidized bed reactor to provide a coating, namely by application of a solution of 50% weight by mass of polyvinyl acetate. After coating the thus coated particles of polylactic acid are impregnated with a blowing agent, namely CO₂, by treatment in a pressure vessel at a pressure of 20 bars for duration of 20 minutes. The impregnated particles of polylactic acid contain approximately 7% weight by mass of CO₂ and a subsequently added to an industrial production

unit for foamed moulded parts, wherein by application of steam expansion and fusion of the particles of polylactic acid takes place to obtain a foamed moulded part, with a density of 60 g/l. In both methods the impregnation of the blowing agent is an essential step.

[0004] EP 1 731 552 relates to insulating foamed material which is formed from expandable styrene polymer consisting of pigment-containing and pigment-free styrene polymer.

[0005] WO2014/027888 (in the name of the present applicant) relates to a particulate, expandable polymer that can be processed into a flame-retardant foam with a fine cellular structure and a low density and that contains a carbon-based material increasing the thermal insulation value to improve the thermal insulation value thereof, wherein the polymer particles contain carbon with a particle size of <1 µm as the material increasing the thermal insulation value.

[0006] WO2014/157538 relates to a molded body of composite resin foam that comprises 100 parts by mass of an ethylene-vinyl acetate copolymer and 100-400 parts by mass of a polystyrene resin. EP 0 732 357 relates to a process for the production of flame proofed polystyrene bead foams containing reclaim, which comprises coating comminuted recycled polystyrene foam with at least one flame proofing agent and fusing the coated pieces together with freshly produced, pre-foamed polystyrene beads to give moldings.

[0007] US 2009/234035 relates to a process for making a foam structure, comprising: providing at least one alkenyl aromatic polymer, such as polystyrene and copolymers thereof and high-impact polystyrene and copolymers thereof; providing at least one bio-based or biodegradable polymer; providing at least one blend compatibilizer, such as maleated SEBS, SEBS, styrene-maleic anhydride copolymer, and styrene-methyl methacrylate copolymer; forming a blend by blending the at least one alkenyl aromatic polymer, at least one bio-based or biodegradable polymer, and at least one blend compatibilizer; extruding the blend to form an extrudate; and expanding the extrudate to produce the foam structure; thermoforming the foam structure to produce a thermoformed article. The bio-based or biodegradable polymer is selected from the group consisting of: polylactic acid and copolymers thereof, polyhydroxyalkanoate and copolymers thereof, and polybutylene succinate or copolymers thereof, polycaprolactone, polyvinyl alcohol and copolymers thereof, polysaccharides, cellulosic polymers and soy-based polymers.

[0008] DE 203 15 226 relates to an insulating foamed material which has been formed from expandable styrene polymer particles, namely from 10 to 90% by weight of pigmented styrene polymer particles and from 90 to 10% by weight of pigment-free styrene polymer particles, wherein the pigments of the pigment-containing styrene polymer particles are selected from among carbon black, metal oxides, metal powders, colour pigments and graphite and the pigment-containing styrene polymer particles contain graphite particles in a homogeneous distribution.

[0009] WO2012/151596 relates to expandable polymers or polymer granules of a polymer blend comprising a cellulose acetate butyrate (CAB) and a styrene polymer, wherein in the polymer blend at least one additional compatible polymer is present, for example polyurethane or polylactic acid, wherein cellulose acetate butyrate (CAB) and styrene together account for more than 80% by weight of the total mass of the polymer blend.

[0010] Particle based expandable polystyrene (EPS) is not only used as a packaging material but also in construction elements, for example as panels in the housing industries. Specific properties are required for such panels with regard to amongst others heat insulation, sound insulation and fire resistance (fire retardancy).

[0011] Over the past years interest in polylactic acid, or PLA, as a renewable biologically degradable material for a broad range of applications has grown tremendously. In developing a foamed moulded product based on an expanded or foamed polylactic acid attention is now also being paid to recycling in connection with the constantly increasing volumes of waste and the growing concern for the environment and recycling issues. In the literature it is often claimed that polylactic acid is not recyclable, and causes problems in particular if it is involved in the process chains of other polymers in the form of contamination.

[0012] Foamed moulded parts based on particulate expandable polystyrene (EPS) and methods for its production are known per se from European patent EP 1 486 530, U.S. Pat. No. 6,465,533, EP 1 587 860, Canadian application CA 2 171 413, British application GB 2 449 353, International application WO 2009/155066, EP 0 235 831, JP 2 222 435 and US 2010/099782.

[0013] EPS, also called expandable polystyrene, is characteristic white plastic foam and consists of about 98% air and about 2% polystyrene. This material is also known as air-pop, polystyrene or Styrofoam. EPS has a variety of applications such as: packaging materials, material for horticultural trays and fish boxes, and insulation for buildings and installations.

[0014] PLA, also called polylactic acid is a polymer of lactic acid molecules. Lactic acid is a substance that is released during various biological processes, such as fermentation of carbohydrates. PLA was already 200 years ago synthesized in a laboratory, but finds its way to industrial applications only for the last ten years. Polylactic acid is a collective term used for polymers based on polylactic acid monomers, in which the structure of the polylactic acid may vary according to the composition, from completely amorphous to semi-crystalline or crystalline. Polylactic acid can be produced from milk products or for example maize.

[0015] Lactic acid is the monomer of which polylactic acid is composed, and this monomer occurs in two stereoisomers, viz. L-lactic acid and D-lactic acid.

[0016] So polylactic acid contains a certain proportion of L-lactic-acid monomers and a certain proportion of D-lactic-acid monomers. The ratio between the L- and D-lactic-acid monomers in polylactic acid determines its properties. This is also known as a D value or D-content, which represents the percentage of D-lactic-acid monomers in the polylactic acid. Polylactic acid that is at present commercially available has an L:D ratio of between 100:0 and 75:25; in other words, a D-content of between 0 and 25%, or between 0 and 0.25. When polylactic acid contains more than approximately 12% D-lactic acid it can no longer crystallise, and is hence completely amorphous. When the D-content is approximately 5%, it is referred to after processing as semi-crystalline polylactic acid. The crystallinity of the polylactic acid can be determined by means of differential scanning calorimetry (DSC). The term "semi-crystalline" is understood to mean that the polymer has arranged its polymer structure by crystallising. Thus it can be stated that the lower the D-content, the higher the crystallinity of the polylactic acid will become. The D-content is usually determined by using a known

method, such as a so-called R-lactate determination using gas-liquid chromatography (GLC) after complete hydrolysis of the polymer. Another standard method is determination via optical rotation (measured in chloroform using a Jasco DIP-140 polarimeter at a wavelength of 589 nm).

[0017] In producing moulded products based on particulate expandable polylactic acid it is of the greatest importance that the fusion between the individual particles is sufficient to obtain a product that will not disintegrate into the individual particles under a slight load. The process conditions are also very important. In view of the limited thermal stability of polylactic acid in comparison with petrochemical or so called oil based polymers it is of the greatest importance that good fusion is realised even under mild process conditions.

[0018] Regarding bio based materials one could say there are in fact two basic reasons which are responsible for the shift from crude oil derivatives towards biological and renewable raw materials. The first reason is the reduction of fossil fuels and the expected decline in oil stocks (long-term continuity of supply), the second is climate change. Climate change is considered to be the main challenge of the society in the coming decades. The uncontrolled release of greenhouse gases has led to an increase in the average temperature of the earth and could lead to further consequences which have an influence on the way of life in many parts of the world. The use of renewable sources reduces this effect and has a significant environmental benefit.

[0019] A peer-reviewed LCA study by AkzoNobel Sustainable Systems has shown that bio based polymers such as EPLA foam (BioFoam, trademark of the present applicant) have a 40-50% lower CO₂ emissions during the entire production chain, compared with EPS foam.

[0020] At this moment (in 2015) the price for EPLA is much higher than EPS, for example due to the fact that i) the raw material price per kilogram of PLA is higher than that of EPS, ii) the specific gravity of moulded foam is 30 g/l for PLA foam compared to 20 g/l for EPS, and iii) additional process equipment is necessary for introducing the blowing agent into the mould.

[0021] An aspect of the present invention is to provide a process for producing bio based foam mouldings having acceptable mechanical properties.

[0022] Another aspect of the present invention is to provide a process for producing bio based foam mouldings wherein standard process equipment for manufacturing foam mouldings can be used.

[0023] Another aspect of the present invention is to provide a process for producing bio based foam mouldings resulting in foam mouldings which are high temperature resistant.

[0024] The present invention thus relates to a process for producing foam mouldings, comprising

[0025] a) providing a first amount of expandable foam particles;

[0026] b) providing a second amount of expandable foam particles;

[0027] c) preparing a physical mixture on basis of said first and second amount of foam particles;

[0028] d) introduction of the mixture of step c) into a mould and sintering under pressure and heat, wherein the chemical origin of the first amount of expandable foam particles differs from the chemical origin of the second amount of foam particles, said process further comprising the presence of a coating in said mixture before said introduction of said mixture into said mould.

[0029] The first amount of expandable foam particles is preferably chosen from the group of oil based polymers, namely polystyrene (PS), polyphenylene oxides (PPOs), polypropylenes (PP), polyethylenes (PE), polyethylene terephthalate (PET), thermoplastic polyurethane (TPU) and blends thereof, especially PS/PE and PS/PPO blends.

[0030] The second amount of expandable foam particles is preferably chosen from the group of bio based polymers, namely polylactic acid (PLA), polybutyrate adipate terephthalate (PBAT), polyhydroxyalkanoates (PHA), polyhydroxybutyrate (PHB), cellulose, starch and blends thereof, especially PLA/starch and PLA/PBAT blends.

[0031] In specific embodiments additional components can be added, such as the usual processing aids, for example flame retardants, agents enhancing the insulating value, flow agents, release agents, anticoagulants and the like, which processing aids may or may not already be mixed with the starting materials. However, the use of additional blowing agent is preferably excluded.

[0032] It is preferred that the second amount of expandable foam particles is present in a range of 2 to 50% by weight, especially 5 to 20% by weight, preferably 10 to 15% by weight, on basis of the total weight of the foam mouldings obtained after step d).

[0033] The present inventors found that for a good adhesion between the bio based polymers and the oil based polymers it is preferred to apply a coating. In a first embodiment the first amount of expandable foam particles is provided with the coating. In a second embodiment the second amount of expandable foam particles is provided with the coating. According to another embodiment the physical mixture on basis of the first and second amount of expandable foam particles is provided with the coating.

[0034] For sintering purposes according to step d) it is preferred to inject steam into the mould. In another embodiment of step d) hot air is injected into the mould.

[0035] In embodiment wherein a PLA/PBAT blend is used, the amount of PBAT is less than 75% by weight, preferably less than 50% by weight, more preferably less than 25% by weight, calculated on the total weight of the PLA/PBAT blend. The present inventors found that the higher amount of PBAT in a PLA/PBAT blend the worse the encapsulation of the bio based polymers in the oil based polymers is.

[0036] The density of the second expandable foam particles is preferably in the range of 7-40 kg/m³.

[0037] The density of the first expandable foam particles is preferably in the range of 8-45 kg/m³.

[0038] According to a preferred embodiment of the present invention the first amount of expandable foam particles is EPS and the second amount of expandable foam particles is EPLA.

[0039] The EPLA has crystallinity in a preferred range of 20 to 100%, especially in a range of 30 and 40%.

[0040] The EPLA is a copolymer of PLA having a preferred D-content of 2-10%, especially 3-7%.

[0041] As mentioned above, it is preferred to apply a coating before the sintering step d) is carried out, wherein the coating is preferably selected from the group consisting of polyurethane, polyvinyl acetate, polyvinyl-acetate-based polymer, polyvinyl alcohol, polycaprolactone, polyester, polyester amide, protein-based material, polysaccharide, natural wax or grease and acrylate or one or more combinations thereof.

[0042] The amount of coating is preferably in a range of 0.5 and 15% by weight, on basis of the weight of the second amount of expandable foam particles in the mixture prepared in step c).

[0043] The particles size of both the first amount of expandable foam particles and second amount of expandable foam particles is preferably in a range of 0.5 and 5 mm, preferably 0.5 and 3 mm.

[0044] The sintering according to step d) can be carried out when the pressure is in the range from 0.5 to 30 kg/cm².

[0045] In the present process for producing foam mouldings wherein the mixture of step c) is introduced in a mould and sintered under pressure and heat therein, the introduction of an additional blowing agent is excluded. The preferred embodiment of the application of a coating will result in a good adhesion between the oil based polymers and the bio based polymers. In addition, the present process for producing foam mouldings as recited in steps a)-d) also excludes the application of an extruder. The present invention furthermore relates to foam mouldings obtained after carrying out the present method.

[0046] The composition of the foam mouldings is preferably based on a sintered, physical mixture of a first amount of expandable foam particles and a second amount of foam particles, wherein the chemical origin of the first amount of expandable foam particles differs from the chemical origin of the second amount of foam particles, wherein between the first and second amount of expandable foam particles a coating is present. The group of first amount of expandable foam particles and second amount of foam particles has been discussed above.

[0047] A preferred embodiment of foam mouldings according to the present invention comprises an EPS and EPLA, wherein EPLA is preferably present in a range of 3 to 50% by weight, especially 5 to 20% by weight, more preferably 10 to 15% by weight, on basis of the total weight of the foam mouldings.

[0048] According to another embodiment it is possible to inject a mixture of the first amount of expandable foam particles and the second amount of foam particles into the cavity between two walls of a building. In such an embodiment a coating has to be present on either of the first amount of expandable foam particles or the second amount of foam particles. Once the cavity between two walls of a building has been filled with this mixture the fusion of both foam particles will start automatically thereby forming a closed structure of fused foam particles. Such a structure has heat insulation, sound insulation and moisture barrier properties.

[0049] The present invention will be further illustrated by way of some Figures and experiments,

[0050] FIG. 1 is a photo of a foam moulding manufactured according to the present method.

[0051] FIG. 2 is another photo of a foam moulding manufactured according to the present method.

[0052] The present inventors carried out several experiments. In the experiments not only the amount of EPLA in EPS was varied, but the coating, the type of the bio based polymer, the % D in the EPLA and the crystallinity of the EPLA as well. The experimental results have been shown in Table I and II. The process conditions in the mould are a temperature of 105° C., residence time of 80 seconds and injection of steam.

[0053] Table I shows the raw materials and its properties. For example, Example 1 is an experiment starting with Styrex

1016R, i.e. a commercial oil based polymer of the Expandable Polystyrene EPS type, manufactured by Synbra Technology BV, and 1 wt. % of EPLA originating from Biofoam (trademark), manufactured by Synbra Technology BV.

[0054] Table II shows the physical and visual properties of the final moulding. Examples 1, 2, 3 and 4 demonstrate that the maximum amount of EPLA is about 5 wt. %. EPLA. The origin is recycled beads that have already been moulded before. Examples 5, 6 and 7 have been carried out with different types of EPLA provided with heat insulating enhancing additives like graphite, graphene and activated carbon, in an amount of 5 wt. % and demonstrate that the encapsulation of the EPLA in the EPS is not sufficient. The present inventors assume that this phenomenon is attributed to the physical disturbing effect of these additives on the crystallisation and this indicates that it will be required to use a lower D content of the bio based polymer. However, the present inventors do not want to be bound to this explanation. Examples 8 and 9 have been carried out with the addition of a coating, namely a PVAC based adhesive, Vinnapas 2501, manufactured by Wacker. These Examples 8 and 9 demonstrate a slight improvement with regards to the encapsulation of the EPLA in the EPS. Examples 10-15 have been carried out with another type of EPS, namely Neopor (trademark) (EPS) from BASF, and polyurethane based adhesive Epotal P100 ECO (trademark) from BASF. Examples 10-15 clearly

demonstrate that acceptable mouldings can be obtained even at a high amount of EPLA, e.g. 30 wt. %. Examples 16-20 have been carried out with other types of bio based polymers showing that acceptable mouldings can be obtained as well. In the Examples the amount of coating, if any, is about 8% by weight, on basis of the weight of the second amount of expandable foam particles in the final mixture.

[0055] In FIG. 1 moulding 10 comprises fused beads of EPS 1 and EPLA 2. Moulding 10 clear shows the individual starting foam particles of EPS 1 and EPLA 2. The EPLA foam particles are fully encapsulated in the EPS matrix. Moulding 10 shown in FIG. 1 has been manufactured according to Example 13.

[0056] FIG. 2 shows a moulding 10 comprising fused beads of EPS 1 and EPLA 2 but the encapsulation of the EPLA 2 in the EPS matrix shows somewhat shortcomings because the EPLA 2 particles are loosely enclosed by the EPS matrix. The present inventors assume that this effect can be attributed by an insufficient amount of coating in the mixture of starting materials. Moulding 10 shown in FIG. 2 has been manufactured according to Example 8.

[0057] The mouldings thus manufactured can not only be used as a packaging material but also in construction elements, for example as panels in the housing industries. Specific properties are required for such panels with regard to amongst others heat insulation, sound insulation and fire resistance.

TABLE 1

Example No.	EPS				EPLA		
	Type	Density (g/l)	Addition EPLA (%)		Density (g/l)	% D in PLA polymer	
						Density (g/l)	Crystallinity PLA
1	Styrex 1016R	20	1	BioFoam milled package, white recycle	30	5.50%	28%
2	Styrex 1016R	20	3	BioFoam milled package, white recycle	30	5.50%	28%
3	Styrex 1016R	20	5	BioFoam milled package, white recycle	30	5.50%	28%
4	Styrex 1016R	20	10	BioFoam milled package, green recycle	30	5.50%	28%
5	Styrex 1016R	20	5	BioFoam, including graphite 5 µm average, L/D 10	18	5.40%	25%
6	Styrex 1016R	20	5	BioFoam, including graphite 5 µm average, L/D 10	18	5.40%	25%
7	Styrex 1016R	20	5	BioFoam, including graphene 0.2 µm thickness, L/D 10	18	5.40%	25%
8	Styrex 1016R	20	5	BioFoam, including active carbon kool 3 µm diameter	18	6.00%	20%
9	Styrex 1016R	20	5	BioFoam, including active carbon 3 µm diameter	17	5.40%	30%
10	Neopor 2400	30	10	BioFoam including extra masterbatch Sukano green	18	5.40%	32%
11	Neopor 2400	30	20	BioFoam including extra masterbatch Sukano green	30	5.40%	29%
12	Neopor 2400	20	30	BioFoam including extra masterbatch Sukano green	18	5.40%	32%
13	Neopor 2300	30	10	BioFoam including extra masterbatch Sukano green	18	5.40%	32%
14	Neopor 2300	30	20	BioFoam including extra masterbatch Sukano green	18	5.40%	32%
15	Neopor 2300	30	30	BioFoam including extra masterbatch Sukano green	18	5.40%	32%
16	Neopor 2300	30	5	PLA/PBAT blends 25% PBAT	30	5.40%	not measured
17	Neopor 2300	30	10	PLA/PBAT blends 50% PBAT	30	5.40%	not measured
18	Neopor 2300	30	10	PLA/PBAT blends 75% PBAT	30	5.40%	not measured
19	Neopor 2300	30	10	Cellulose	40	5.40%	not measured
20	Neopor 2300	30	10	PLA 95% PHA 5%	40	5.40%	not measured

TABLE II

Results				
Example		EPLA		
No.	End product	Glue type added	Remarks	
1	ok	none	Milled package, damaged surface of beads	
2	ok	none	Milled package, damaged surface of beads	
3	reasonable	none	Milled package, damaged surface of beads	
4	reasonable	none	Milled package, damaged surface of beads	

TABLE II-continued

Results			
Example	EPLA		
No.	End product	Glue type added	Remarks
5	strongly ingevallen	none	
6	strongly ingevallen	none	
7	strongly ingevallen	none	
8	strongly ingevallen	PVAC base	supplier additive Vinnapas 2501 Wacker
9	reasonable	PVAC base	supplier additive Vinnapas 2501 Wacker
10	ok	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
11	ok	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
12	ok	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
13	ok	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
14	ok	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
15	reasonable	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
16	reasonable	polyurethane, biodegradable	Supplier additive Vinnapas 2501 Wacker
17	strongly ingevallen	polyurethane, biodegradable	Supplier BASF, Trademark Epotal P100 ECO, PBAT supplier BASF
18	strongly ingevallen	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
19	reasonable	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO
20	reasonable	polyurethane, biodegradable	supplier BASF, Trademark Epotal P100 ECO

What is claimed is:

1. A process for producing foam moldings, comprising
 - a) providing a first amount of expandable foam particles;
 - b) providing a second amount of expandable foam particles;
 - c) preparing a physical mixture on basis of said first and second amount of foam particles;
 - d) introduction of the mixture of step c) into a mold and sintering under pressure and heat, wherein the chemical origin of the first amount of expandable foam particles differs from the chemical origin of the second amount of foam particles, said process further comprising the presence of a coating in said mixture before said introduction of said mixture into said mold.
2. A process according to claim 1, wherein said first amount of expandable foam particles is provided with said coating.
3. A process according to claim 1, wherein said second amount of expandable foam particles is provided with said coating.
4. A process according to claim 1, wherein said physical mixture on basis of said first and second amount of expandable foam particles is provided with said coating.
5. A process according to claim 1, wherein in step d) hot air is injected into the mold.
6. A process according to claim 1, wherein in step d) steam is injected into the mold.
7. A process according to claim 1, wherein the first amount of expandable foam particles is chosen from the group consisting of polystyrene (PS), polyphenylene oxides (PPOs), polypropylenes (PP), polyethylenes (PE), polyethylene terephthalate (PET), thermoplastic polyurethane (TPU) and blends thereof, especially PS/PE and PS/PPO blends.
8. A process according to claim 1, wherein the second amount of expandable foam particles is chosen from the group consisting of polylactic acid (PLA), polybutyrate adipate terephthalate (PBAT), polyhydroxyalkanoates (PHA), polyhydroxybutyrate (PHB), cellulose, starch and blends thereof, especially PLA/starch and PLA/PBAT blends.
9. A process according to claim 8, wherein in a PLA/PBAT blend the amount of PBAT is less than 75% by weight, less than 50% by weight, or less than 25% by weight, calculated on the total weight of said PLA/PBAT blend.

10. A process according to claim 1, wherein the density of the second expandable foam particles is in the range of 7 to 40 kg/m³.

11. A process according to claim 1, wherein the density of the first expandable foam particles is in the range of 8 to 45 kg/m³.

12. A process according to claim 1, wherein the second amount of expandable foam particles is present in a range of 2 to 50% by weight, 5 to 20% by weight, or 10 to 15% by weight, on basis of the total weight of the foam moldings obtained after step d).

13. A process according to claim 1, wherein said first amount of expandable foam particles is EPS and said second amount of expandable foam particles is EPLA.

14. A process according to claim 13, wherein said EPLA has crystallinity in a range of 20 to 100% or 30 to 40%.

15. A process according to claim 13, wherein said EPLA is a copolymer of PLA having a D-content of 2 to 10% or 3 to 7%.

16. A process according to claim 1, wherein said coating is selected from the group consisting of polyurethane, polyvinyl acetate, polyvinyl-acetate-based polymer, polyvinyl alcohol, polycaprolactone, polyester, polyester amide, protein-based material, polysaccharide, natural wax or grease, acrylate and one or more combinations thereof.

17. A process according to claim 16, wherein the amount of coating is in a range of 0.5 to 15% by weight, on basis of the weight of said second amount of expandable foam particles in the mixture prepared in step c).

18. A process according to claim 1, wherein the particles size of both the first amount of expandable foam particles and second amount of expandable foam particles is in a range of 0.5 to 5 mm or 0.5 to 3 mm.

19. A process according to claim 1, wherein the pressure is in the range from 0.5 to 30 kg/cm².

20. A process according to claim 1, wherein no additional blowing agent is used in said step of sintering under pressure and heat.

21. A foam molding obtained according to the process of claim 1.

22. A foam molding according to claim 21, wherein the composition of the foam molding is based on a sintered, physical mixture of a first amount of expandable foam par-

ticles and a second amount of foam particles, wherein the chemical origin of the first amount of expandable foam particles differs from the chemical origin of the second amount of foam particles, wherein between said first and second amount of expandable foam particles a coating is present.

23. A foam molding according to claim **21**, wherein said first amount of expandable foam particles is EPS and said second amount of expandable foam particles is PLA, wherein PLA is present in a range of 3 to 50% by weight, 5 to 20% by weight, or 10 to 15% by weight, on basis of the total weight of the foam moldings.

* * * * *